


## Small but powerful: Flush-mounting dimmer DIMAX 540 plus B



**Quick and convenient installation**

The DIMAX 540 plus B flush-mounted dimmer for R and C loads is hardly bigger than a two-euro coin: It is simply mounted behind a standard push button and is therefore perfect for retrofitting.

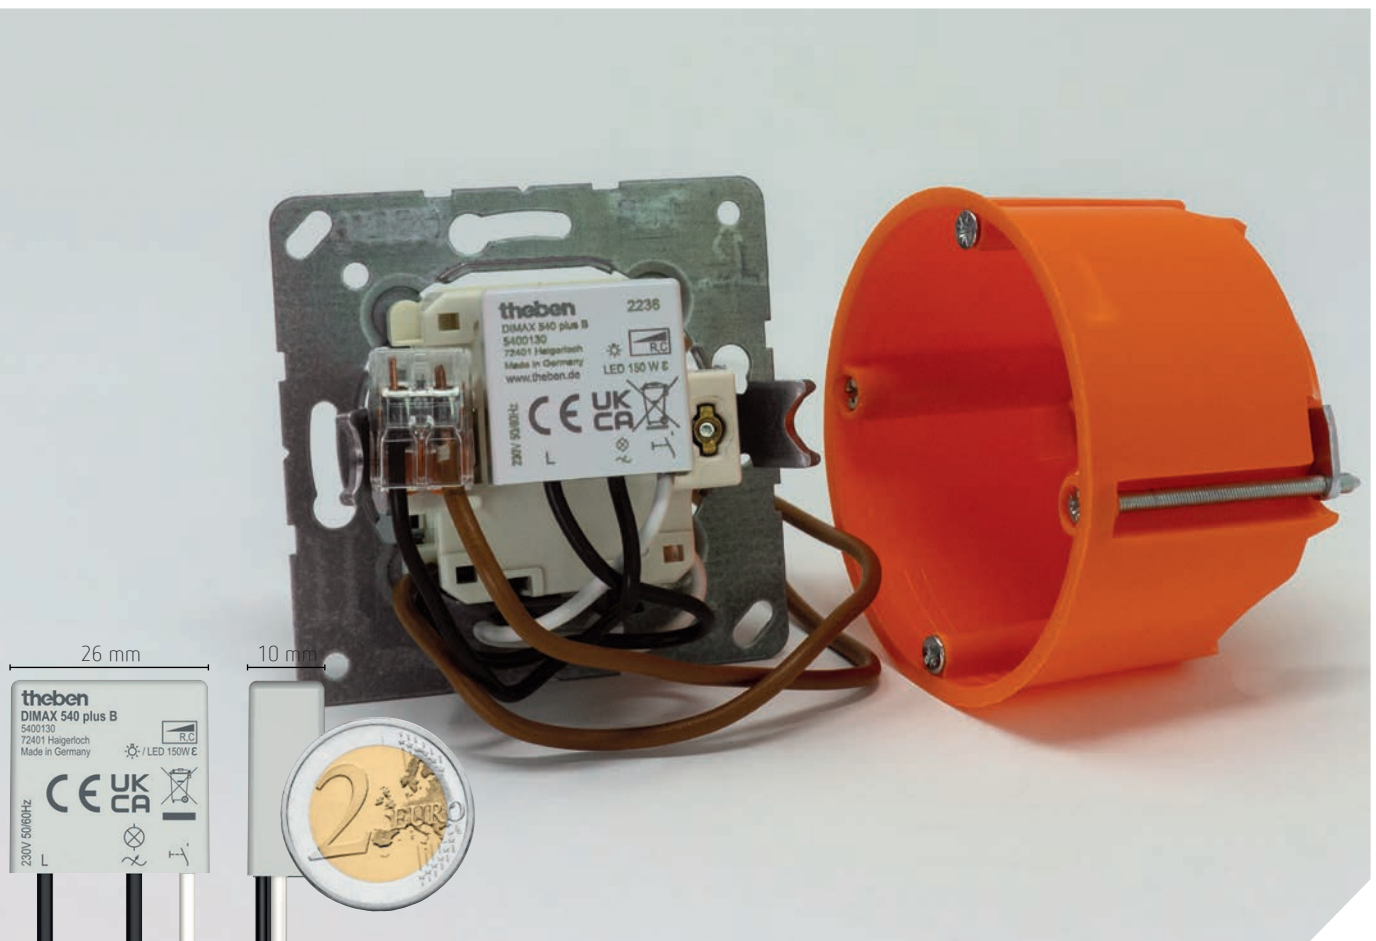

**Perfect for LEDs: Thanks to adjustable minimum brightness**

The attractively priced 2-wire flush-mounted dimmer offers optimised settings for LEDs and is compatible with dimmable LEDs from 2-150 W (trailing edge). Thanks to the adjustable minimum brightness, you can ensure that your LED is lit or switched off safely and avoid a potential problem.



**Safety first**


The tiny device with completely encapsulated electronics does not require a neutral conductor and offers maximum fire protection thanks to temperature and overcurrent shutdown, as well as a short-circuit protection.



**Handy memory function**

The memory function saves the most recently set light level value and then dims to this value the next time it is switched on. With a double click, the dimmer switches the lamp to 100%.



## Small but powerful: Flush-mounting dimmer DIMAX 540 plus B

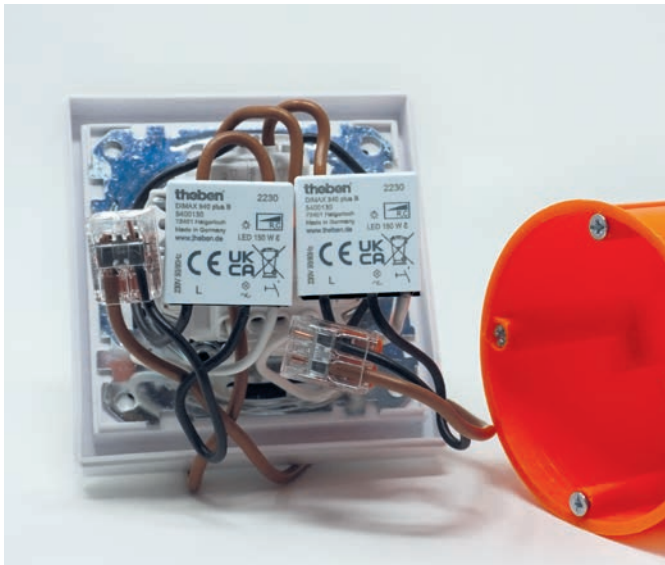

### Function description

- Flush-mounted dimmer for R and C loads (only trailing edge)
- Optimised settings for LEDs
- Configurable minimum brightness
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- 100% brightness at double click
- Fully encapsulated electronics
- No neutral conductor required
- Small design, perfect for retrofitting
- Temperature switch-off
- Overcurrent switch-off
- Short circuit protection

### Wiring diagrams

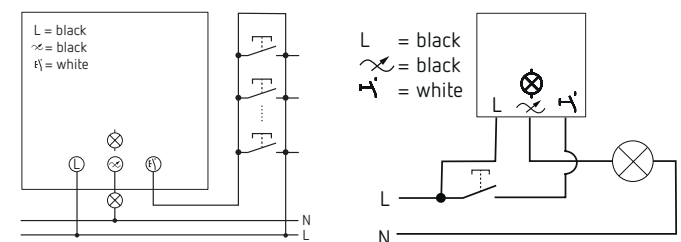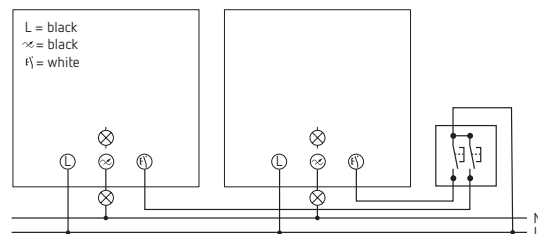

### Technical data

Item no.	5400130
Operating voltage	230 V AC
Frequency	50 – 60 Hz
Type of installation	Flush-mounting
Standby output	~0.34 W
Incandescent/ halogen lamp load	150 W
LED lamp	Trailing edge: 150 W
Ambient temperature	-10 °C ... 45 °C

Switching and dimming LED:  
It's that simple!

Find out more at  
[www.theben.de/perfect-led-dimming](http://www.theben.de/perfect-led-dimming)

### Accessories

#### LED compensation module

(Item no.: 9070825)



- LED compensation module for dimmer
- To prevent afterglow with LED lamps
- To connect in parallel with the load