

Analogues DIN rail time switches - talento 211 mini

Item No 02.03.0003.1 / EAN Code 4010940022563



APPLICATIONS

- ▶ Advertising lighting
- ▶ Show window lighting
- ▶ Water treatment
- ▶ Pump control



TECHNICAL DATA

Electrical Data

Supply voltage	DC 130 V
	AC 230 V $\pm$ 10% 50-60 Hz
Current output	Switch contact, potential-free
Current capacity - ohmic load	16 A / 250 V AC
Current capacity - inductive load cos.phi 0.6	4 A / 250 V AC
Load incandescent bulb	1.000 W
Power consumption	1 VA
Accuracy	$\pm$ 2,5 Second /Day at 20 °C
Power reserve	> 50 Hours

Power connection

Device	Screw terminal with wire protection max. 4 mm ²
	Captive latching screw

Operating specifications

Manual switch	Automatic mode
	Fix ON
Channels	1
Tempering protection	Lead-sealable
Program	Daily program (ON/OFF)

Display and format

Shortest switching time	ON/OFF 30 minutes
-------------------------	-------------------

Operating conditions

Temperature (operation)	-20 °C ... +55 °C
-------------------------	-------------------


General specifications

Number of modules	1
Colour	Gray
Weight	110 g
Dimension	45 x 17,5 x 60 mm
Mounting	DIN rail

Compliance with standards

Protection type	IP20
Protection class	II, according to corresponding mounting
Approval mark	CE, GOST, VDE
Standards and guidelines	EN 60730-1, EN 60730-2-7

DIMENSIONAL DRAWINGS

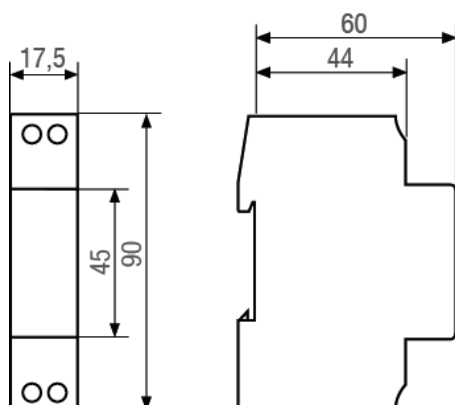

CIRCUIT DIAGRAMS

