


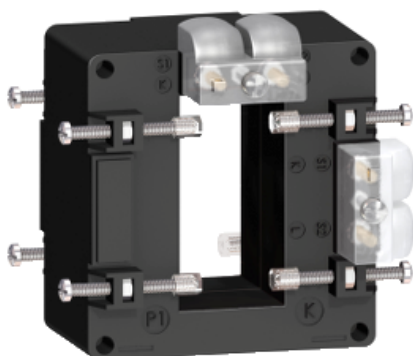

Main

Range	PowerLogic
Product name	CT
Product or component type	Current transformer
Secondary current	5 A
Accuracy class	Class 0.5 15 VA Class 1 20 VA
[In] rated current	1250 A

Complementary

Current transformer type	Tropicalised for busbar
Current transformer ratio	1250/5
[Ith] conventional free air thermal current	60 kA
Dynamic withstand current	2.5 Ith
Maximum safety factor	5
[Ue] rated operational voltage	< 720 V AC 50/60 Hz
[Ui] rated insulation voltage	3 kV
Mounting mode	Insulated locking screw
Mounting support	Busbar
Width	Outside 90 mm Inner 65 mm
Height	Outside 94 mm Inner 32 mm
Depth	Frame 40 mm Total 87 mm
Net weight	0,636 kg
[Uimp] rated impulse withstand voltage	3 kV
Electrical insulation class	Class B
Opening of bars	65 x 32

Sealing	With
---------	------

Environment

Standards	IEC 61869-2 VDE 0414
Product certifications	EAC CE
IP degree of protection	IP20
Relative humidity	0...95 %
Ambient air temperature for operation	-25...50 °C

Offer Sustainability

Status održive ponude	Proizvod Green Premium
Uredba REACH	Izjava REACH
REACH, bez SVHC	Da
Direktiva EU RoHS	Sukladno Izjava EU RoHS
Propis RoHS za Kinu	Izjava RoHS za Kinu Proizvod izvan dosega propisa RoHS za Kinu. Informativna deklaracija o tvarima.
Izjava o očuvanju okoliša	Ekološki profil proizvoda
Profil cirkularnosti	Informacije o kraju vijeka trajanja
WEEE	Proizvod se na tržištima EU mora odlagati u skladu sa specifičnim propisima o prikupljanju otpada; nikako se ne smije odlagati s komunalnim otpadom.