

Use

Acoustic signal devices: buzzer, bronze bell


Range

Designation	Item
Bronze bell	<input type="checkbox"/> RW4351V230
	<input checked="" type="checkbox"/> RG4351V230
Buzzer	<input type="checkbox"/> RW4356V230
	<input checked="" type="checkbox"/> RG4356V230

Color code:

White colour Black colour

Overall dimensions (mm)

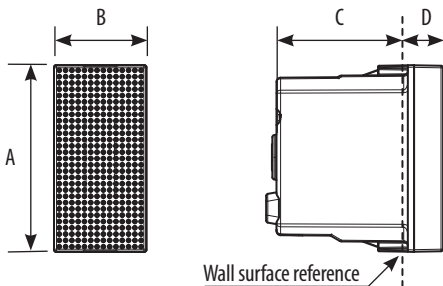

	A	B	C	D
..4351V230	45.1	22.3	33	9.8
..4356V230				

Connection

Terminal Type: screw clamp
Terminal Capacity: 2 x 2.5 mm² max
Stripping Length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics
Impact test: IK 04

- Material characteristics
Material:
Case and Key cover: PC (Polycarbonate)
Halogen-free
UV resistant
Self-extinguishing:
850°C/30 s for insulating parts holding live parts in place
650°C/30 s for other parts made of insulating materials

- Electrical characteristics
Voltage: 250 V a.c.
Current: 12 VA
Acoustic intensity level: 80dB

- Climatic characteristics
Storage temperature: -10° C to +70° C
Use temperature: -5° C to +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards: IEC/EN 62080
Refer to e.catalogue.