



Main

Range of product	Easypact CVS400...630
Product or component type	Circuit breaker
Device short name	CVS400N
Device application	Distribution
Poles description	4P
Protected poles description	4d 3d + N/2 3d
Neutral position	Left
Earth leakage protection (Vigi add on)	Without
[In] rated current	400 A (40 °C)
Breaking capacity code	N
Network type	AC
[Icu] Breaking capacity	70 kA Icu conforming to IEC 60947-2 at 220/240 V AC 50/60 Hz 42 kA Icu conforming to IEC 60947-2 at 440 V AC 50/60 Hz 50 kA Icu conforming to IEC 60947-2 at 380/415 V AC 50/60 Hz
Utilisation category	Category A
Trip unit name	ETS 2.3
Trip unit technology	Electronic
Trip unit rating	400 A (40 °C)
Protection type	Overload protection (long time) Instantaneous short-circuit protection Short time short-circuit protection

Complementary

Network frequency	50/60 Hz
Control type	Toggle
Mounting mode	Fixed

Mounting support	Backplate
Upside connection	Front
Downside connection	Front
Connections - terminals	Screw connection
[Uimp] rated impulse withstand voltage	8 kV conforming to EN/IEC 60947-2
[Ics] rated service breaking capacity	70 kA conforming to IEC 60947-2 220/240 V AC 50/60 Hz 50 kA conforming to IEC 60947-2 380/415 V AC 50/60 Hz 32 kA conforming to IEC 60947-2 440 V AC 50/60 Hz
Mechanical durability	15000 cycles
Electrical durability	6000 cycles conforming to IEC 60947-2 415 V In
Connection pitch	45 mm
Contact position indicator	Yes
Neutral protection setting	0.5 x Ir 3d + N/2 1 x Ir 4d
Trip unit protection functions	LSol
Long time pick-up adjustment type Ir	Adjustable 9 settings
Long time pick-up adjustment range	160...400 A
Long time delay adjustment type	Fixed
[Tr] long-time delay adjustment range	200 s 1.5 x Ir 5.5 s 7.2 x Ir 8 s 6 x Ir
Thermal memory	Yes
Short-time pick-up adjustment type Isd	Adjustable 9 settings
[Isd] short-time pick-up adjustment range	1.5...10 x Ir
Short-time delay adjustment type	Fixed
Instantaneous pick-up adjustment type Ii	Fixed
Instantaneous pick-up adjustment range	11 x In
Height	255 mm
Width	185 mm
Depth	110 mm
Product weight	6.3 kg

Environment




Electrical shock protection class	Class II
Standards	EN 60947-2 IEC 60947-2
Product certifications	GOST IEC
IP degree of protection	IP40
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1041 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available Product Environmental Profile
Product end of life instructions	Available End of Life Information





Contractual warranty

Warranty period	18 months
-----------------	-----------

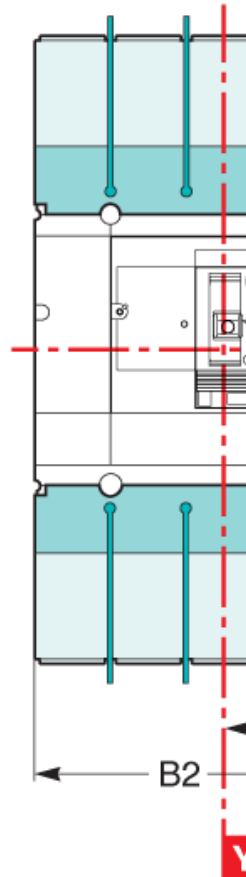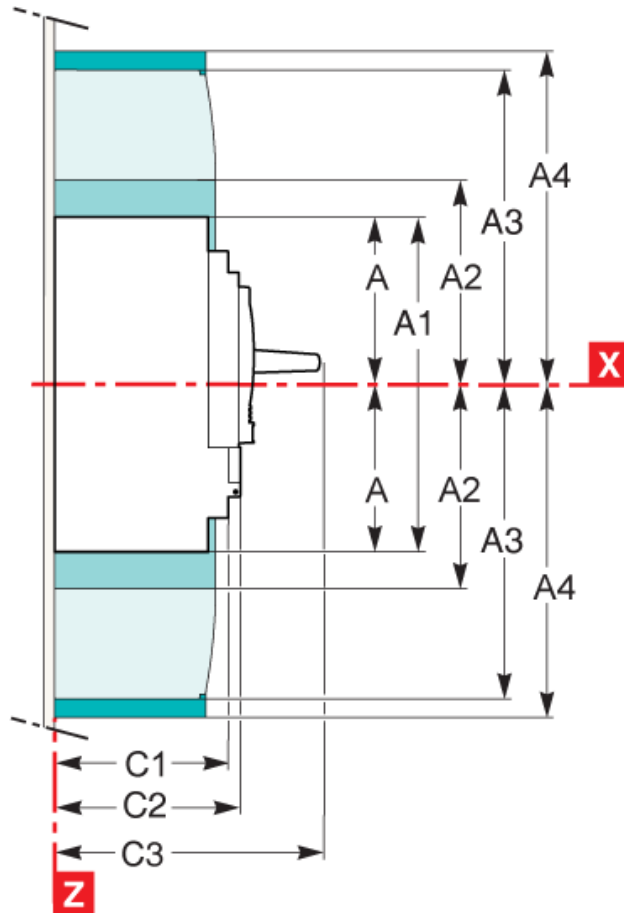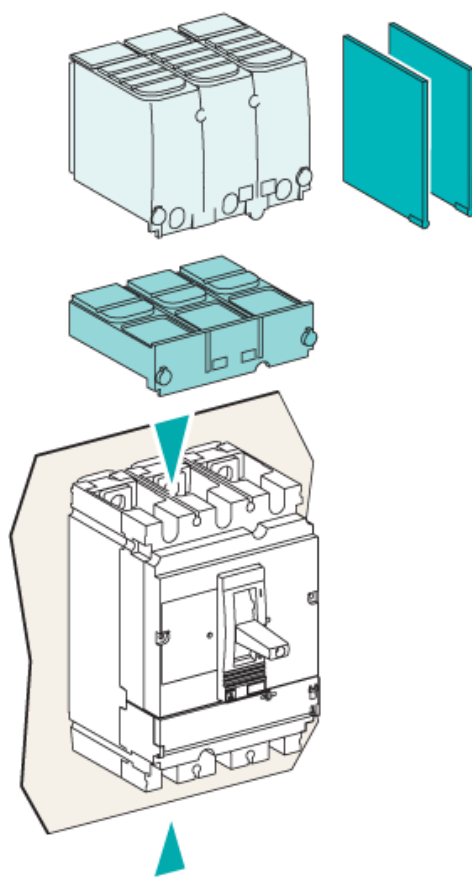

Type	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	B1	B2	C1	C2	C3	E1
CVS100/160/250	80.5	161	94	145	178.5	155.5	236	169	220	253.5	52.5	105	140	81	86	111 ⁽²⁾	62.5
CVS400/630	127.5	255	142.5	200	237	227.5	355	242.5	300	337	70	140	185	95.5	110	168	100
Type	E2	E3	E4	E5	E6	E7	E8	F1	F2	F3	G1	G2	G3	G4	G5	ØT	U
CVS100/160/250	125	70	140	137.5	200	145	215	35	17.5	70	96	75	13.5	23	17.5	24	y 32
CVS400/630	200	113.5	227	200	300	213.5	327	45	22.5	90	-	-	-	-	-	32	y 35

(2) C3 > 126mm for EasyPact CVS250B/F.

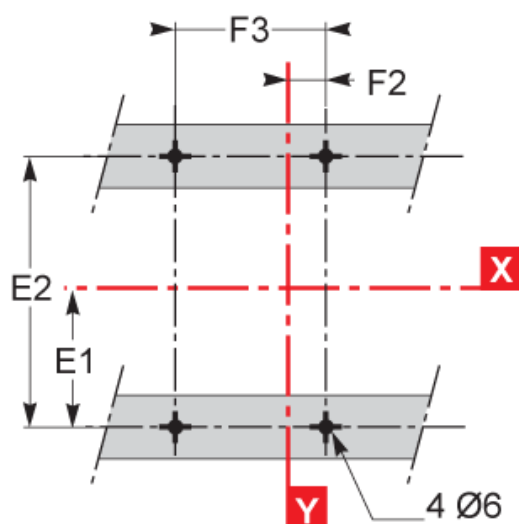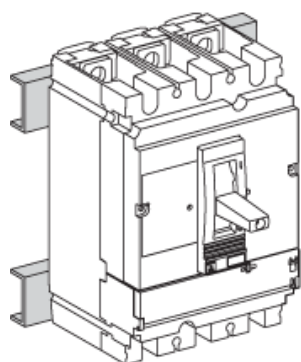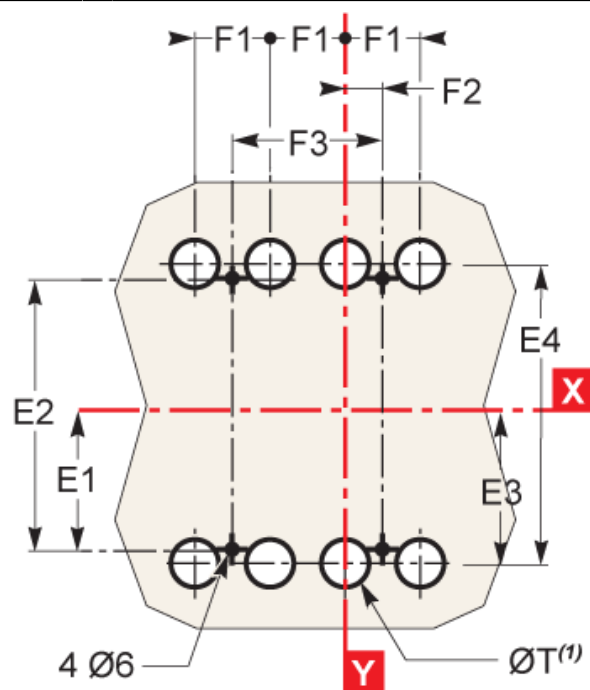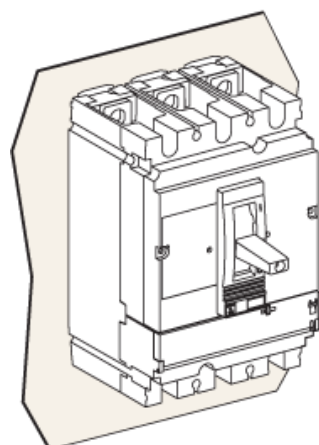

Type	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	B	B1	B2	C1	C2	C3	E1
CVS100/160/250	80.5	161	94	145	178.5	155.5	236	109	220	253.5	52.5	105	140	81	86	111 ⁽²⁾	62.5
CVS400/630	127.5	255	142.5	200	237	227.5	355	242.5	300	337	70	140	185	95.5	110	168	100
Type	E2	E3	E4	E5	E6	E7	E8	F1	F2	F3	G1	G2	G3	G4	G5	ØT	U
CVS100/160/250	125	70	140	137.5	200	145	215	35	17.5	70	95	75	13.5	23	17.5	24	y 32
CVS400/630	200	113.5	227	200	300	213.5	327	45	22.5	90	-	-	-	-	-	32	y 35

(2) C3=126mm for EasyPact CVS250B.F.

