



Classia

- One-way switch lightable with led lamp
- Two-way switch lightable with led lamp
- Four-way switch lightable with led lamp
- Pushbutton lightable with led lamp


RW4001LA - RG4001LA - RW4001LR - RG4001LR - RW4001L - RG4001L - RW4001M2L - RG4001M2L
 RW4003L - RG4003L - RW4003M2L - RG4003M2L
 RW4004L - RG4004L - RW4004M2L - RG4004M2L
 RW4005L - RG4005L - RW4005M2L - RG4005M2L - RW4043 - RG4043 - RW4042V12 - RG4042V12
 RW4042V230 - RG4042V230




..4001L
 ..4003L
 ..4005L




..4001M2L
 ..4003M2L
 ..4005M2L



..4004L



..4004M2L



..4001..
 ..4042....
 ..4043

Use

Rocker control device for lighting and other loads.


Range

Designation	Item 1 Module	Item 2 Modules	Led Lamp
One-way switches	☐ RW4001L	☐ RW4001M2L	230V
1P 10AX 250 Va.c.	☒ RG4001L	☒ RG4001M2L	
	☐ RW4001LR		230V
	☒ RG4001LR		
	☐ RW4001LA		230V
	☒ RG4001LA		
Two-way switches	☐ RW4003L	☐ RW4003M2L	230V
1P 10AX 250 Va.c.	☒ RG4003L	☒ RG4003M2L	
Four-way switches	☐ RW4004L	☐ RW4004M2L	230V
Intermediate 10AX 250 Va.c.	☒ RG4004L	☒ RG4004M2L	
Pushbuttons	☐ RW4005L	☐ RW4005M2L	230V
1P (NO) 10A 250 Va.c.	☒ RG4005L	☒ RG4005M2L	
	☐ RW4043		230V
	☒ RG4043		
	☐ RW4042V230		230V
	☒ RG4042V230		
	☐ RW4042V12		12V
	☒ RG4042V12		

Color code:

☐ White colour ☒ Black colour

Overall dimensions (mm)

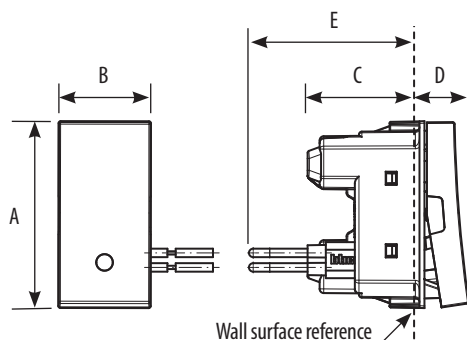

..4001.. / ..4003.. / ..4042.. / ..4043	A	B	C	D	E
1 Module	45.1	22.3	27	11.9	29.5
2 Modules	45.1	44.7	27	11.9	29.5
..4004..	A	B	C	D	E
1 Module	45.1	22.3	28.1	11.9	30.6
2 Modules	45.1	44.7	28.1	11.9	30.6

Connection

Terminal type: screw clamp

Terminal capacity: 2 x 4 mm² max

Stripping length: 9 mm

Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)

Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:

Case: PC (Polycarbonate)

Key cover: ABS - ABS/PC

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.

Current: 10AX for ..4001.. / ..4003.. / ..4004..

Current: 10A for ..4005.. / ..4042.. / ..4043

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.