


Product data sheet

Characteristics

RPZF3

utičnica RPZ–mješoviti kontakt–16 A–<250 V–
vijčana stezaljka–za relej RXM3..

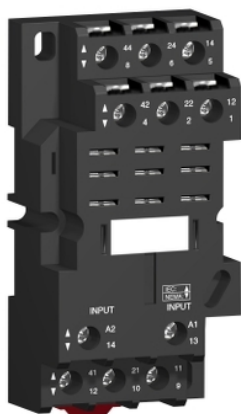

Main

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RPM 3 C/O
Shape of pin	Flat
Device short name	RPZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	15 A
[Ue] rated operational voltage	< 250 V
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	40 mm
Net weight	0,072 kg

Environment

Connections - terminals	- screw clamp terminals, flexible with cable end 1 x 0.25...2 x 1 mm ² / AWG 22...AWG 17 - screw clamp terminals, solid without cable end 1 x 0.5...2 x 1.5 mm ² / AWG 20...AWG 16
Standards	IEC 61984
Product certifications	CSA UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 EN/IEC 60529
Dielectric strength	2500 V

Offer Sustainability

Status održive ponude	Proizvod Green Premium
Uredba REACH	 Izjava REACH
REACH, bez SVHC	Da
Direktiva EU RoHS	Proaktivna sukladnost (proizvod izvan zakonskog okvira direktive EU RoHS)  Izjava EU RoHS
Bez otrovnih teških metala	Da
Bez žive	Da
Informacije o RoHS izuzeću	 Da

Propis RoHS za Kinu	 Izjava RoHS Za Kinu
Izjava o očuvanju okoliša	 Ekološki Profil Proizvoda
Profil cirkularnosti	Nema potrebe za specifičnim operacijama recikliranja
WEEE	Proizvod se na tržištima EU mora odlagati u skladu sa specifičnim propisima o prikupljanju otpada; nikako se ne smije odlagati s komunalnim otpadom.

Contractual warranty

Jamstvo	18 months
---------	-----------