


Product data sheet

Characteristics

33662

MX shunt trip release, Compact NS 630b to Compact NS 3200, 200 VDC to 250 VDC, 200 VAC to 250 VAC 50/60 Hz

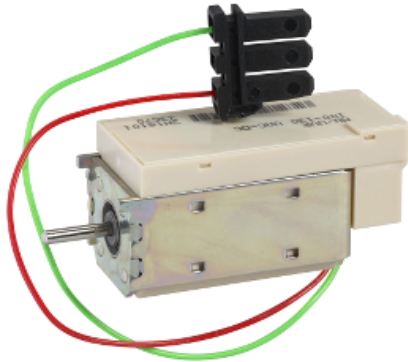

Main

| | |
|------------------------------|---|
| Device short name | MX |
| Product or component type | Voltage release |
| Device application | Control |
| Range compatibility | Masterpact NW Compact NS1600b...3200 Compact NS630b...1600 Masterpact NT |
| Offer type | C4 C5 |
| Voltage release type | Shunt trip release |
| [Uc] control circuit voltage | 200...250 V DC 200...250 V AC |

Complementary

| | |
|------------------------------------|---|
| Threshold tripping voltage | 0.7...1.1 Un |
| Supply holding power | 4.5 VA |
| Response time | 50 ms |
| Accessory / separate part category | Spare parts Masterpact NT Spare parts Masterpact NW Spare parts Compact NS1600b...3200 Spare parts Compact NS630b...1600 |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|